



RHLED

OUTDOOR LED REMOTE HEAD

ILLUMINATION

- Long lasting, efficient, ultra bright white LED lamp heads.
- High performance chrome-plated metallized reflector and glass lens with 8 or 12 LED's in each lamp head for optimal light distribution.
- Adjustable LED lamp heads increases center-to-center spacing.

ELECTRICAL

- Powered from low voltage power source with low voltage wiring (not provided).

MOUNTING

- Universal mounting base mounts to single-gang switch box.
- Distance of maximum run is determined by system voltage, wire gauge and total maximum wattage on the run.
- Suitable for wall or ceiling mount.


HOUSING

- Available in both engineering grade, high-impact resistant thermoplastic or premium grade die-cast aluminum housing.
- Sealed and gasketed in standard gray or optional black finish.

WARRANTY / LISTING

- Five year warranty.
- UL Listed with approved Best Lighting Products.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

DIMENSIONS

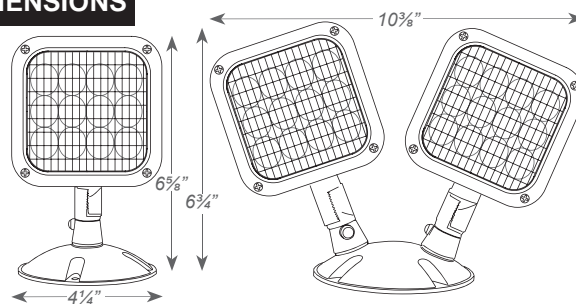

FIXTURE COMPATIBILITY CHART

Reference individual unit equipment specification sheets for remote load capacity availability.

MODEL TYPE	3.6V	9.6V	MV
LEDCXTEU-RC		X	X
CLPU-RC		X	X
CKXTEU-RC	X		X
LED5-HO	X		X
LEDTFX-2		X	X
E-1-RC	X		X
CEU-RC	X		X

ORDERING INFORMATION

Sample Part Number: **RHLED-1-WP-9.6**

MODEL	No. of HEADS	OPTIONS	HOUSING	VOLTAGE	COLOR	LAMP TYPE ¹
RHLED	1 Single Head	Blank For standard non-self-diagnostic fixtures	PWP Thermoplastic	3.6V For use with 3.6V batteries	Blank Gray	Blank 8 LEDs 1W
	2 Double Head	SDT For use with fixtures with a self-diagnostic option	WP Die-cast	9.6V For use with 9.6V batteries MV For use with 3.6V, 6V, 9.6V & 12V batteries	B Black	HL 12 LEDs 1.5W

Notes:

1. Wattage rating stated per head.

Factory LED Lights Inc.

Head Office: 276 Sunset Point, Cochrane AB T4C0K9

www.factoryleds.com vic@factoryleds.com

(587)-333-1832 Canada

(214)-396-2232 USA



FACTORY LEDS